


FIBER OPTIC GYROSCOPE

VG221LN

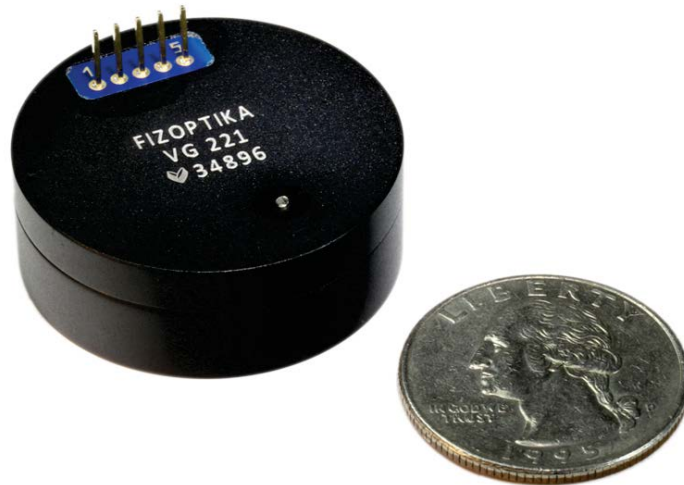

PROVISIONAL DATASHEET

PERFORMANCE

Input range	°/s	300	for info
Bias, RMS	°/h	3	Allan variance min
ARW	°/√h	0.025	white noise PSD
Bandwidth	kHz	1	2nd order LPF
SF, RMS	%	0.03	day-to-day
Magnetic response	°/h/Gauss	4	typical (non-shielded)

ELECTRICAL INTERFACE

Start-up	s	0.05	
Powering	W	0.5	+5V

ENVIRONMENT

Operating temperature	°C	-40...+70	
Endurance temperature	°C	-55...+85	> 2 h, non-operating
Vibration, RMS	g	12	20 Hz... 2000 Hz
Shocks	g	750	1 ms half-sine

PHYSICAL PARAMETERS

Dimensions	mm (in)	Ø33x12 (Ø1.3x0.5)	ISO 2768-m
Volume	cl (oz)	1 (1/3)	
Weight	gram	17	est
Housing		Al alloy	

RELIABILITY

MTBF	h	70 000	humidity conditions applied
Lifetime	yr	15	humidity conditions applied

fizoptika.com

Provisional Datasheet

Jan 2023

Fizoptika Malta reserves the right to change the design or specifications at any time without prior notice. All pictures shown are for illustration purpose only. The actual product may vary due to the ongoing product enhancement.